



## P2P-KDT302

Point-to-Point Dual-Head DisplayPort CAT5 & Fiber Transmitter with USB 2.0, Audio, and Optional RS-232.

Extend, control, and manage your DP-based workstation over IP with the P2P-KDT302. Supporting flexible Direct, Matrix, and SaviGate modes, the P2P-KDT302 adapts to your installation needs — from simple point-to-point extensions to full multi-user managed environments — over CATx or Fiber.

### FEATURES



Selectable Direct, Matrix, and SaviGate modes via web interface



Supports DP video up to 4K @ 30Hz or 1080p @ 60Hz



Transparent USB 2.0 extension for peripherals



SaviGate Gateway support for centralized management (sold separately)



Ultra-low latency JPEG2000 compression



Plug-and-play installation



Analog audio and Optional RS-232 passthrough



EDID learning and management



Up to 100 m over CATx / 10 km over fiber

### IDEAL USE CASES



AV and IT extension for secure environments



Digital signage and workspace centralization



Medical and industrial command centers



Military and government operations



Broadcast and production control rooms

# HOW IT WORKS

## Flexible KVM extension and switching

The P2P-KDT302 can operate in multiple modes depending on your application needs:



### Direct Mode

Simple point-to-point extension without configuration



### Matrix Mode


OSD-based multi-user KVM switching across a network



### SaviGate Mode

Centralized management, access control, and advanced routing when integrated with a SaviGate controller

Modes are easily changed using a simple dropdown menu within the web browser interface of each unit.

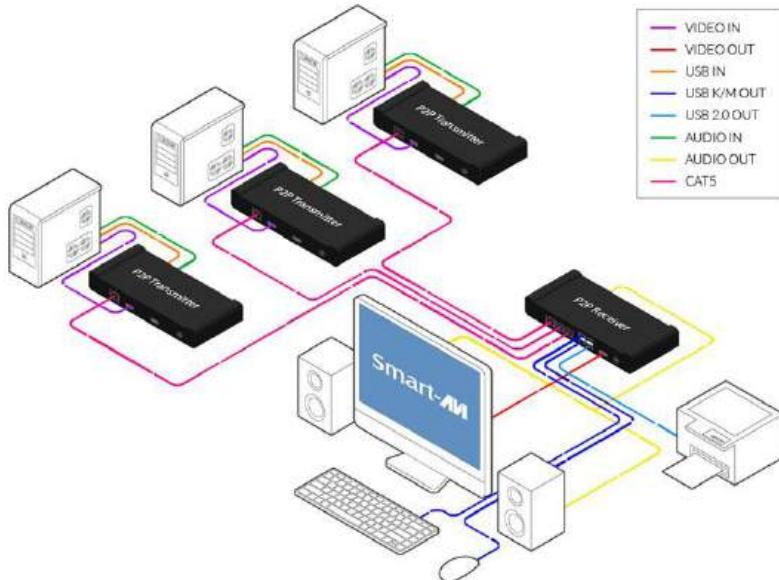

## COMPATIBLE TRANSMITTERS

Pairs with the following transmitter models for point-to-point operation:

- **P2P-KVR302** - Dual-Head DVI Receiver via CATx & Fiber
- **P2P-KHR302** - Dual-Head HDMI Receiver via CATx & Fiber
- **P2P-KDR302** - Dual-Head DisplayPort Receiver via CATx & Fiber

## SPECIFICATIONS

Video OUT		USB			
Format	DisplayPort 1.2 Dual-Head, Video Bandwidth Up To 17.28 Gbps per channel	Out	USB Type B, USB 2.0, USB 1.1, USB 1.0 compatible		
Video Resolution	Up To 4K @ 30 Hz (each output)	KM	Keyboard & Mouse Emulation		
Connector	2x DisplayPort (20-Pin Female)	Other			
System			Power		
Interface	EDID Storage & Emulation		12 V DC, 3 A (Power Supply Included)		
Transmission Distance	Up To 100 m; LC Connector Fiber Multimode: Up to 500 m; Fiber Single Mode: Up to 10 km		135,540 Hours (MIL-HDBK-217F (N2) Parts Count Prediction Calculator)		
Compression	Ultra-Low Latency JPEG2000		Environmental Operating Temperature		
Optional RS-232	Optional Pass-Through up to 115200		0 °C to 45 °C (32 °F to 113 °F)		
Management	Selectable Direct, Matrix, SaviGate Gateway support for centralized management (sold separately)		Environmental Operating Humidity		
Audio			10 % to 90 %, non-condensing		
Format	PCM 2.0/2.1/5.1/7.1, Dolby Digital 5.1 ch, Dolby Digital Plus, Dolby TrueHD, DTS 5.1 ch		ESD Protection		
In/Output Interface	3.5 mm Stereo Aux Socket (Female)		Protection per IEC 61000-4-2 Standard at ±30 kV Air and ±30 kV Contact		
Support Warranty			Support Warranty		
Certification			1-Year		
Dimensions			CE, FCC, RCM, UL		
Weight			11.5" W x 5.25" D x 1.70" H		
Weight			1.81lbs and 0.82kg		

## ORDERING DETAILS

P2P-KHT300-S	HDMI Transmitter with Single Head support, Point-to-Point mode over CATx & Fiber connection. [P2P-KHT300, PS5VD2A]
--------------	--