DK117 1U Dual Slide 4K LED-backlit LCD Console Drawer

CyberView™




Benefits

- 1U 17.3" 4K LCD console drawer
- Dual slide - LCD and keyboard slide independently
- 3840 x 2160@60Hz native resolution / 16.7M colors (8-bit)
- 104-key USB keyboard with touchpad
- Display port 1.2 video input / USB KB/MS
- Built-in dual stereo speakers
- One Man installation design
- Enhanced aesthetics with molded front handle and two point lock
- 2-year standard warranty (upgradable up to 5 years)
- TAA Compliant

Options

- HDMI 2.0 video input **(HDMI)**
- 3G / HD / SD-SDI Broadcast-grade input **(SDI)**
- DC power : 12V / 24V / 48V / 125V / 250V



Product Specifications

Console Port	
Video input	Display port 1.2
KB / MS	USB interface
DP console 6ft. cable : CX-6DP	Drawer end : DP + USB type A x 2 Server end : DP + USB type A x 2

Video Option		
Digital	HDMI	HDMI 2.0 / HDCP 2.2

LED-backlit LCD Panel	
Panel size (diagonal)	17.3"
Native resolution	3840 x 2160@60Hz
Brightness (cd/m²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	16
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	50,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 35W / Max. 52W
	Power saving mode	Max. 2W / Max. 18W
	Power button off	Max. 1W / Nil

Physical		
Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console / Console w/ KVM	590 x 815 x 140 mm 23.2 x 32.1 x 5.5 inch
Net weight	Single console	12 kg / 26.4 lb
	Console w/ KVM	13 kg / 28.6 lb
Gross weight	Single console	18 kg / 39.6 lb
	Console w/ KVM	19 kg / 41.8 lb

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

*** All dimensions stated are subject to change if options are selected / integrated to base model part codes**

Mounting Distance	
Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch


Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.

DK117 models w/ KVM

** Resolution related to LCD specification

HDMI KVM	IP	Remote	8-port
	0	0	DK117 - 801K



HDMI USB KVM Cable



CK - 6H (6 ft)
4K HDMI - HDMI cable




CK - 6P (6 ft)
4K HDMI - DP cable



CH - 6D (6 ft)
2K HDMI - DVI-D cable

DP KVM	IP	Remote	8-port
	0	0	DK117 - 801DP



DP USB KVM Cable


Resolution Support ** : 16:9 - max. 3840 x 2160
16:10 - max. 1920 x 1200




CK - 6DP (6 ft)
4K DP - DP cable

Standard Keyboard

Ge G keyboard with touchpad

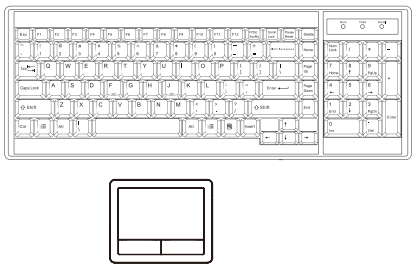

Gb G keyboard with trackball

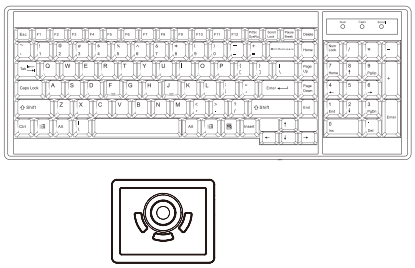

Supporting layouts

America	U.S.				
EMEA	U.K.	Germany	France	Spain	Italy
Asia	Japan	Korea			

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.