DK1417

1U Dual Slide Ultra Short Depth 4K LED-backlit LCD Console Drawer

CyberView™



Benefits

- 1U 17.3" LCD console drawer
- Dual slide - LCD and keyboard slide independently
- Ultra short depth 480mm / 18.9"
- 3840 x 2160@60Hz native resolution
- 16.7M colors support (8-bit)
- HDMI 2.0 + DP 1.2 + VGA video input / USB KB / MS
- Dual stereo speakers for HDMI 2.0 & DP 1.2
- Ideal for open rack / short depth rack
- 104-key keyboard with touchpad
- One Man installation design
- Enhanced aesthetics with new molded front panel and 2-point lock
- 2-year standard warranty (upgradable up to 5 years)
- TAA Compliant

Options

- 3G / HD / SD-SDI Broadcast-grade input **(SDI)**
- DC power : 12V / 24V / 48V / 125V / 250V
- KVM integration : Refer to dual slide DK117 series
  www.austin-hughes.com/PS-CV-DK117.pdf

Product Specifications

Console Port	
Video input	HDMI 2.0 + DP 1.2 + VGA
KB / MS	USB interface
Console cable bundled	HDMI 2.0 cable x 1 + USB type A cable x 2

LED-backlit LCD Panel	
Panel size (diagonal)	17.3”
Native resolution	3840 x 2160@60Hz
Brightness (cd/m²)	400
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M, 8-bit
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	16
Dot pitch (mm)	0.0995
Display area (mm)	382.12H x 214.94V
Surface treatment	Anti-glare
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	15,000

Physical	
Product (W x D x H)	442 x 480 x 44 mm / 17.4 x 18.9 x 1.73 inch
Packing (W x D x H)	590 x 622 x 140 mm / 23.2 x 24.5 x 5.5 inch
Net weight	10.6 kg / 23.4 lb
Gross weight	15.6 kg / 34.4 lb

*** All dimensions stated are subject to change if options are selected / integrated to base model part codes**

Mounting Distance	
Single console drawer	490 ~ 720 mm / 19.3 ~ 28.3 inch


Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 35W / Max. 52W
	Power saving mode	Max. 2W / Max. 18W
	Power button off	Max. 1W / Nil

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Standard Keyboard

Ge G keyboard with touchpad

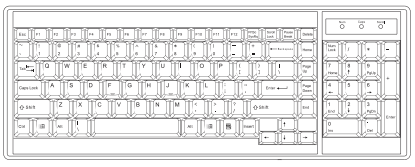



Supporting layouts

America	U.S.				
EMEA	U.K.	Germany	France	Spain	Italy
Asia	Japan	Korea			

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.