L120 1U LCD Console Drawer

CyberView™



Benefits

- 1U 20.1" LCD console drawer
- 1600 x 1200 native resolution / 16.7M colors
- 104-key USB keyboard with touchpad
- One Man installation design
- Enhanced aesthetics with molded front panel and 2-pt lock
- 2-year standard warranty (upgradable up to 5 years)
- TAA Compliant

Options

- HDMI + DVI-D + Audio + Speakers **(DV4.4)**
- DP + Speakers **(DP)**
- HDMI + Speakers **(HDMI)**
- Composite + Audio IN + Speakers **(BNC)**
- 3G / HD / SD-SDI Broadcast-grade input + Speakers **(SDI)**
- DC power : 12V / 24V / 48V / 125V / 250V

Product Specifications

Console Port	
Video input	VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2

Video Option		
Digital	DVI	DVI-D single link
	HDMI	HDMI 1.4 / HDCP 1.4
	Display port	DP 1.0 / HDCP 1.3
Analog	Composite (BNC)	NTSC & PAL

LCD Panel	
Panel size (diagonal)	20.1"
Native resolution	1600 x 1200
Brightness (cd/m²)	300
Contrast ratio (typ.)	800 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	16
Dot pitch (mm)	0.255
Display area (mm)	408H x 306V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	CCFL
MTBF (hrs)	45,000

Power		
Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 45W / Max. 78W
	Power saving mode	Max. 2W / Max. 34W
	Power button off	Max. 1W / Nil

Physical		
Product (W x D x H)	Single console	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
	Console w/ KVM	442 x 650 x 44 mm 17.4 x 25.6 x 1.73 inch
Packing (W x D x H)	Single console / Console w/ KVM	590 x 815 x 140 mm 23.2 x 32.1 x 5.5 inch
Net weight	Single console	14.5 kg / 31.9 lb
	Console w/ KVM	15.5 kg / 34.1 lb
Gross weight	Single console	22 kg / 48.4 lb
	Console w/ KVM	23.4 kg / 51.5 lb

Environment	
Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

*** All dimensions stated are subject to change if options are selected / integrated to base model part codes**

Mounting Distance	
Single console drawer / Console w/ KVM drawer	660 ~ 870 mm 26 ~ 34.3 inch

Compliance	
EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.

L120 models w/ KVM

** Resolution related to LCD specification

HDMI KVM

IP	Remote	8-port
0	0	L120 - 801K

HDMI KVM Cable



CK - 6H (6 ft)
4K HDMI - HDMI cable



CK - 6P (6 ft)
4K HDMI - DP cable



CH - 6D (6 ft)
2K HDMI - DVI-D cable

DP KVM

IP	Remote	8-port
0	0	L120 - 801DP

DP USB KVM Cable

Resolution Support ** : 16:9 - max. 3840 x 2160
16:10 - max. 1920 x 1200



CK - 6DP (6 ft)
4K DP - DP cable

DVI-D KVM

IP	Remote	12-port
0	0	L120 - 1201D

DVI-D USB KVM Cable

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200



CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM

IP	Remote	8-port	16-port	32-port
1	1	-	L120 - MUIP1613	L120 - MUIP3213
2	1	-	L120 - MUIP1624	L120 - MUIP3224
0	1	-	L120 - MU1602	L120 - MU3202
0	2	-	L120 - MU1603	L120 - MU3203
0	3	-	L120 - MU1604	L120 - MU3204

Cat6 Combo KVM

IP	Remote	8-port	16-port	32-port
1	0	L120 - UIP802	L120 - UIP1602	L120 - UIP3202
0	1	L120 - U802	L120 - U1602	L120 - U3202
0	0	L120 - U801	L120 - U1601	L120 - U3201

Cat6 KVM Dongle



DG - 100C
USB-C dongle



DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle



DG - 100S
VGA - USB dongle

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

DB-15 Combo KVM

IP	Remote	8-port	16-port
1	0	L120 - IP802	L120 - IP1602
0	1	L120 - 802	L120 - 1602
0	0	L120 - S801	L120 - S1601

DB-15 VGA USB KVM Cable



CB - 6 (6 ft)



CB - 10 (10 ft)





CB - 15 (15 ft)

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

Standard Keyboard

Ge G keyboard with touchpad

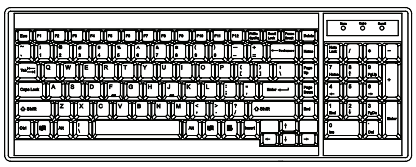



Supporting layouts

America	U.S.				
EMEA	U.K.	Germany	France	Spain	Italy
Asia	Japan	Korea			

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.