X124 1U WUXGA LED-backlit LCD Console Drawer

CyberView™



Model (left side open)	Model (right side open)
X124	X124R

Benefits

- 1U 24.1" LCD console drawer
- 1920 x 1200 **WUXGA** native resolution / 16.7M colors
- HDMI 1.4 + VGA video input / USB KB / MS
- 104-key USB keyboard with either touchpad or trackball
- One Man installation design
- Enhanced aesthetics with new molded front panel and 2-pt lock
- 2-year standard warranty (upgradable up to 5 years)
- TAA Compliant

Options

- Dual stereo speakers for HDMI **(HS4.4)**
- DP + Speakers **(DP)**
- DVI-D + Audio + Speakers **(DV4.4)**
- 3G / HD / SD-SDI Broadcast-grade input + Speakers **(SDI)**
- Front USB hub port for device access **(USB)**
- DC power : 12V / 24V / 48V / 125V / 250V
- Touchscreen : Resistive 1-pt

Product Specifications

Console Port

Video input	HDMI 1.4 + VGA
KB / MS	USB interface
VGA console 6ft cable : CB-6A	Drawer end : DB-15 + USB type A x 2 Server end : DB-15 + USB type A x 2
or	
HDMI console 6ft cable : CX-6B	Drawer end : HDMI + USB type A x 2 Server end : HDMI + USB type A x 2

Video Option

Digital	DVI-D	DVI-D single link
	DisplayPort	DP 1.0 / HDCP 1.3

LED-backlit LCD Panel

Panel size (diagonal)	24.1"
Native resolution	1920 x 1200
Brightness (cd/m²)	300
Contrast ratio (typ.)	1000 : 1
Colors	16.7 M
Viewing angle (L/R/U/D)	89/89/89/89
Response time (ms)	14
Dot pitch (mm)	0.27
Display area (mm)	518.4H x 324V
Surface treatment	Anti-glare, Hard-coating
Surface hardness	3H
Backlight type	LED
MTBF (hrs)	30,000

Power

Input	Auto-sensing 100 to 240VAC, 50 / 60Hz	
Consumption (console / KVM)	Screen on	Max. 33W / Max. 65W
	Power saving mode	Max. 2W / Max. 30W
	Power button off	Max. 1W / Nil

Physical

Product (W x D x H)	Single console	442 x 690 x 44 mm 17.4 x 27.2 x 1.73 inch
	Console w/ KVM	442 x 800 x 44 mm 17.4 x 31.5 x 1.73 inch
Packing (W x D x H)	Single console / Console w/ KVM	590 x 965 x 136 mm 23.2 x 38 x 5.4 inch
Net weight	Single console	15.3 kg / 33.7 lb
	Console w/ KVM	16.1 kg / 35.4 lb
Gross weight	Single console	19.5 kg / 42.9 lb
	Console w/ KVM	22 kg / 48.4 lb

Environment

Operating temp.	0 to 55°C degree
Storage temp.	-20 to 60°C degree
Operating humidity	10~90%, non-condensing
Storage humidity	5 ~90%, non-condensing
Operating altitude	16,000 ft
Non-operating altitude	40,000 ft
Shock	10G acceleration (11ms duration)
Vibration	10~300Hz 0.5G RMS random vibration

*** All dimensions stated are subject to change if options are selected / integrated to base model part codes**

Mounting Distance

Single console drawer	660 ~ 890 mm 26 ~ 35 inch
Console w/ KVM drawer	660 ~ 970 mm 26 ~ 38.2 inch

Compliance

EMC	FCC & CE
Safety	CE / LVD & UKCA
Environment	REACH & RoHS3 / WEEE

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.

X124 models w/ KVM

** Resolution related to LCD specification

For right side open - Add R at the end of the model no.
sample : X124-MUIP3224R

HDMI KVM

IP	Remote	8-port
0	0	X124 - 801K

HDMI KVM Cable



CK - 6H (6 ft)
4K HDMI - HDMI cable



CK - 6P (6 ft)
4K HDMI - DP cable



CH - 6D (6 ft)
2K HDMI - DVI-D cable

DP KVM

IP	Remote	8-port
0	0	X124 - 801DP

DP USB KVM Cable

Resolution Support ** : 16:9 - max. 3840 x 2160
16:10 - max. 1920 x 1200



CK - 6DP (6 ft)
4K DP - DP cable

DVI-D KVM

IP	Remote	12-port
0	0	X124 - 1201D

DVI-D USB KVM Cable

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200



CI - 6 (6 ft)
CI - 15 (15 ft)

Cat6 Matrix KVM

IP	Remote	8-port	16-port	32-port
1	1	-	X124 - MUIP1613	X124 - MUIP3213
2	1	-	X124 - MUIP1624	X124 - MUIP3224
0	1	-	X124 - MU1602	X124 - MU3202
0	2	-	X124 - MU1603	X124 - MU3203
0	3	-	X124 - MU1604	X124 - MU3204

Cat6 Combo KVM

IP	Remote	8-port	16-port	32-port
1	0	X124 - UIP802	X124 - UIP1602	X124 - UIP3202
0	1	X124 - U802	X124 - U1602	X124 - U3202
0	0	X124 - U801	X124 - U1601	X124 - U3201

Cat6 KVM Dongle



DG - 100C
USB-C dongle



DG - 100P
DP - USB dongle



DG - 100H
HDMI - USB dongle



DG - 100SD
DVI - USB dongle



DG - 100S
VGA - USB dongle

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200

DB-15 Combo KVM

IP	Remote	8-port	16-port
1	0	X124 - IP802	X124 - IP1602
0	1	X124 - 802	X124 - 1602
0	0	X124 - S801	X124 - S1601

DB-15 USB Hub KVM

IP	Remote	8-port
1	0	X124 - IP802H
0	1	X124 - 802H
0	0	X124 - 801H

DB-15 VGA USB KVM Cable



CB - 6 (6 ft)



CB - 10 (10 ft)





CB - 15 (15 ft)

Resolution Support ** : 16:10 - max. 1920 x 1200
16:9 - max. 1920 x 1080
4:3 - max. 1600 x 1200


Standard Keyboard


Ge G keyboard with touchpad

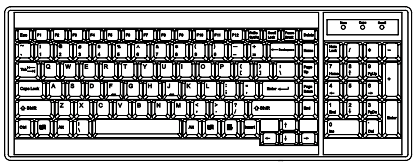



Gb G keyboard with trackball

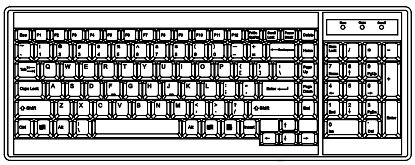



Supporting layouts

America	U.S.					
EMEA	U.K.	Germany	France	Spain	Italy	
Asia	Japan	Korea				

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication. All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.