


# 17.3" 1 Port Full HD LCD Console (SW1701)




## Overview


The SW1701 Full HD 1 port LCD console integrates the monitor, keyboard and mouse in a 1U device; it fits for installed in a standard 19" rack. It can connect one computer to control the monitor, keyboard and mouse.

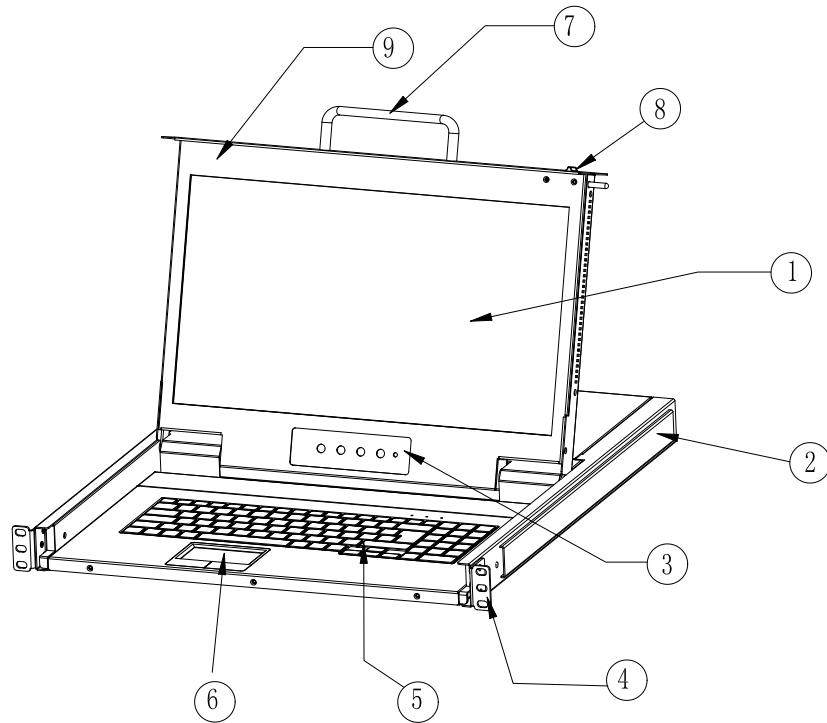

1 LCD Monitor	6 Touchpad
2 Rear Bracket Slot	7 Handle
3 Display Menu Buttons	8 Release Switch
4 Mounting Bracket	9 Display Panel
5 Keyboard	

## Structure

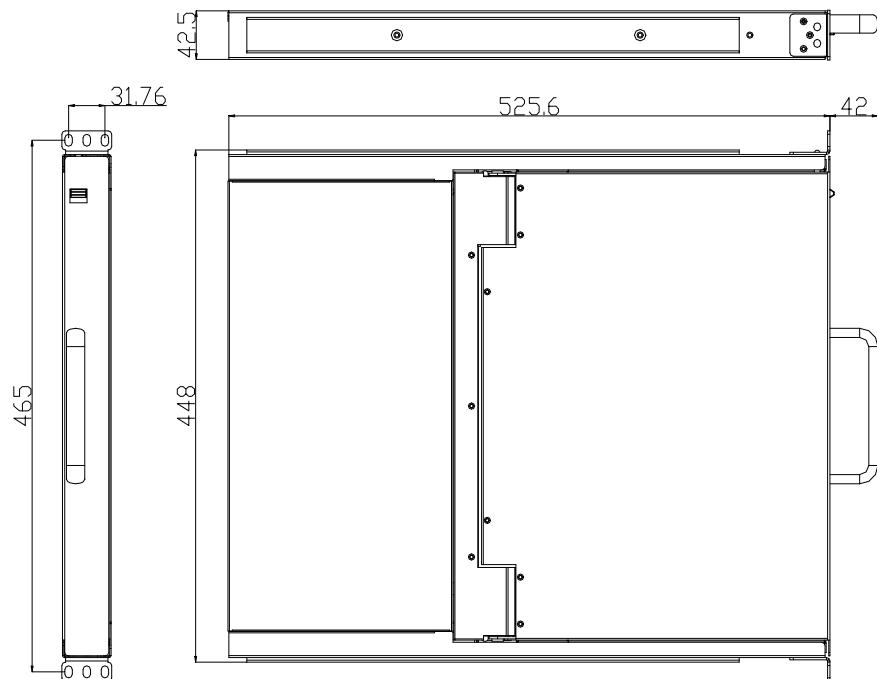

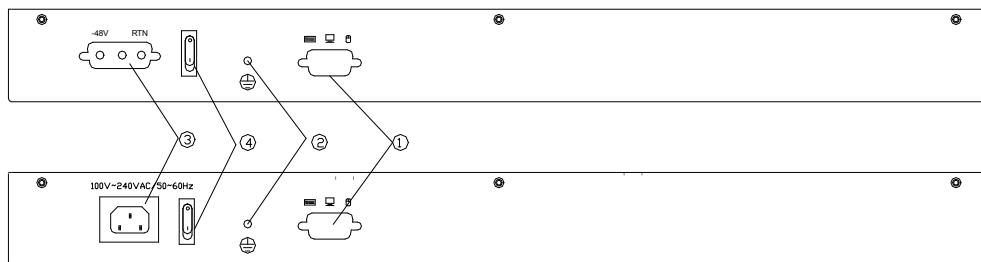


1 PC Port	3 Power input(AC or DC)
2 Ground Connection Screw	4 Power switch

## Features

- 3 in 1 LCD console integrates the monitor, keyboard and mouse.
- The HD console can be connected to a PC or a KVM switch to control and manage single / multiple PCs.
- 17.3" full HD monitor with high brightness, high definition and high resolution.
- Ultra-slim keyboard with 99 keys and numeric keypad
- Standard PS/2 emulation
- Automatically lock up with the front panel lock latch
- Compact steel construction and high-quality hand-protection sliding rails

## Connection Diagram

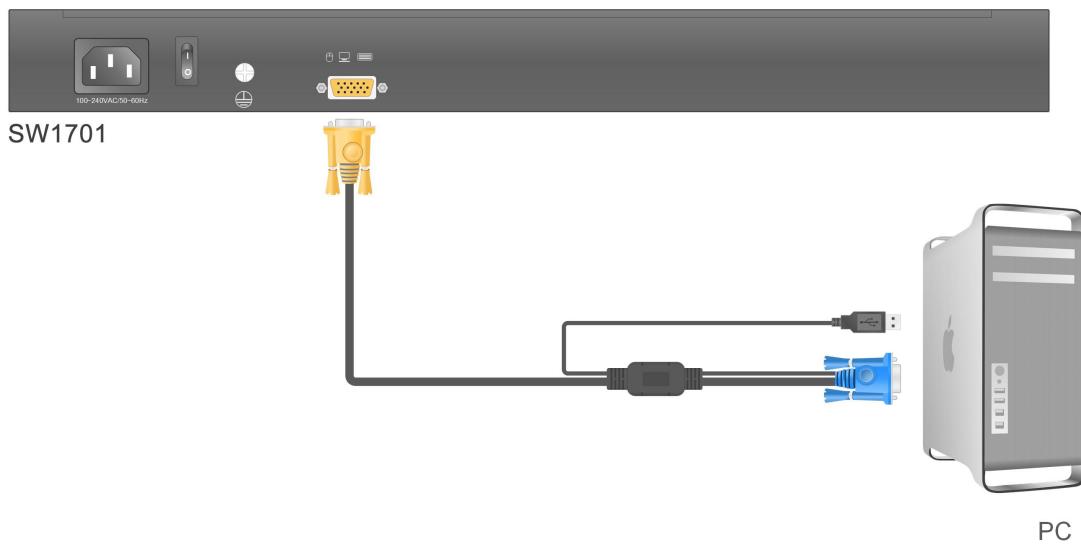

## Package Contents

- 1x LCD Console
- 1x Power Cord (Regional)
- 1x Quick Start Guide
- 2x Mounting Rails
- 1x USB+VGA KVM Cable (1.8m/6ft)

**Specifications**

Model		SW1701
Computer Connections	Direct	1
	Max	1
Port emulation	Keyboard, mouse	PS/2, USB
LCD monitor	LCD model	FHD TFT
	View area	17.3"
	Optimum resolution	1920×1080@60Hz
	Display color	262K
	Brightness	300cd/m <sup>2</sup> (T y p)
	Contrast ratio	800: 1(T y p)
Mouse	Pixel pitch(mm)	0.1989(H) × 0.1989(W)
	X/Y resolution	>1000 points / inch, (40 points/mm)
Keyboard	Touchpad	Eliminates the need for an external mouse
		99 keys (82 keys main keyboard +17 independent small number pad)
Input power	100V – 240Vac, 50 ~ 60Hz, <1.5A	
Power consumption	11W	
Operating temperature	0 – 50 °C	
Storage temperature	-20 – 60 °C	
Humidity	0 – 80% RH, non-condensing	
Net weight	10.5 kg	
Product dimension (W × D × H)	448mm×525.6mm×42.5mm	
Package dimension (W × D × H)	765mm×615mm×185mm	
Optional power input	-36V– -72Vdc	