

SM-UVH-4D

4-PORT DUAL-HEAD UNIVERSAL DISPLAYPORT & HDMI KVM SWITCH



ACCESS AND CONTROL UP TO 4 COMPUTERS WITH ANY COMBINATION OF DP OR HDMI CONNECTIONS FROM A SINGLE USB KEYBOARD, MOUSE, AND TWO MONITORS

FEATURES

-  Universal DisplayPort & HDMI inputs/outputs
-  Dual-Head support in a slim 2U rackmount design
-  Seamless USB 2.0 and KM switching
- 4K** Crisp 4K@60 UHD resolution
-  AUX emulation for stable dual-display setups

APPLICATIONS

- Server Collocation
- Digital Signage
- Education
- Airports
- Dealer Rooms
- Control Rooms
- Audio/Visual Presentations
- Shopping Centers
- Hotels/Resorts



Designed and Manufactured in the USA

UNIVERSAL DISPLAYPORT & HDMI KVM

Unlike traditional KVM switches that lock you into a single format, the SM-UVH-4D is a universal solution that supports both DisplayPort and HDMI sources and monitors. You can mix and match DP and HDMI PCs and displays across the same unit without compromise, solving a growing challenge in multi-format environments.

BUILT TO LAST — RELIABLE & SECURE


This tried-and-true design incorporates separate DisplayPort and HDMI connectors on every port, ensuring full compatibility while maintaining a slim rackmount form factor. The proprietary connector layout is safer and more robust than competitor designs, reducing the risk of damage from repeated use and making it ideal for demanding professional environments.

CRISP 4K UHD PERFORMANCE

Supporting up to 4K@60Hz Ultra HD resolution, the SM-UVH-4D delivers pixelperfect clarity with zero signal loss, even in the most demanding workflows. Whether in medical imaging, command and control, or financial trading floors, the video quality stays sharp and stable.

TECHNOLOGY & CONNECTOR

Dual-Display configuration with universal DP/HDMI inputs and outputs. Optimized for enterprise rackmount environments.

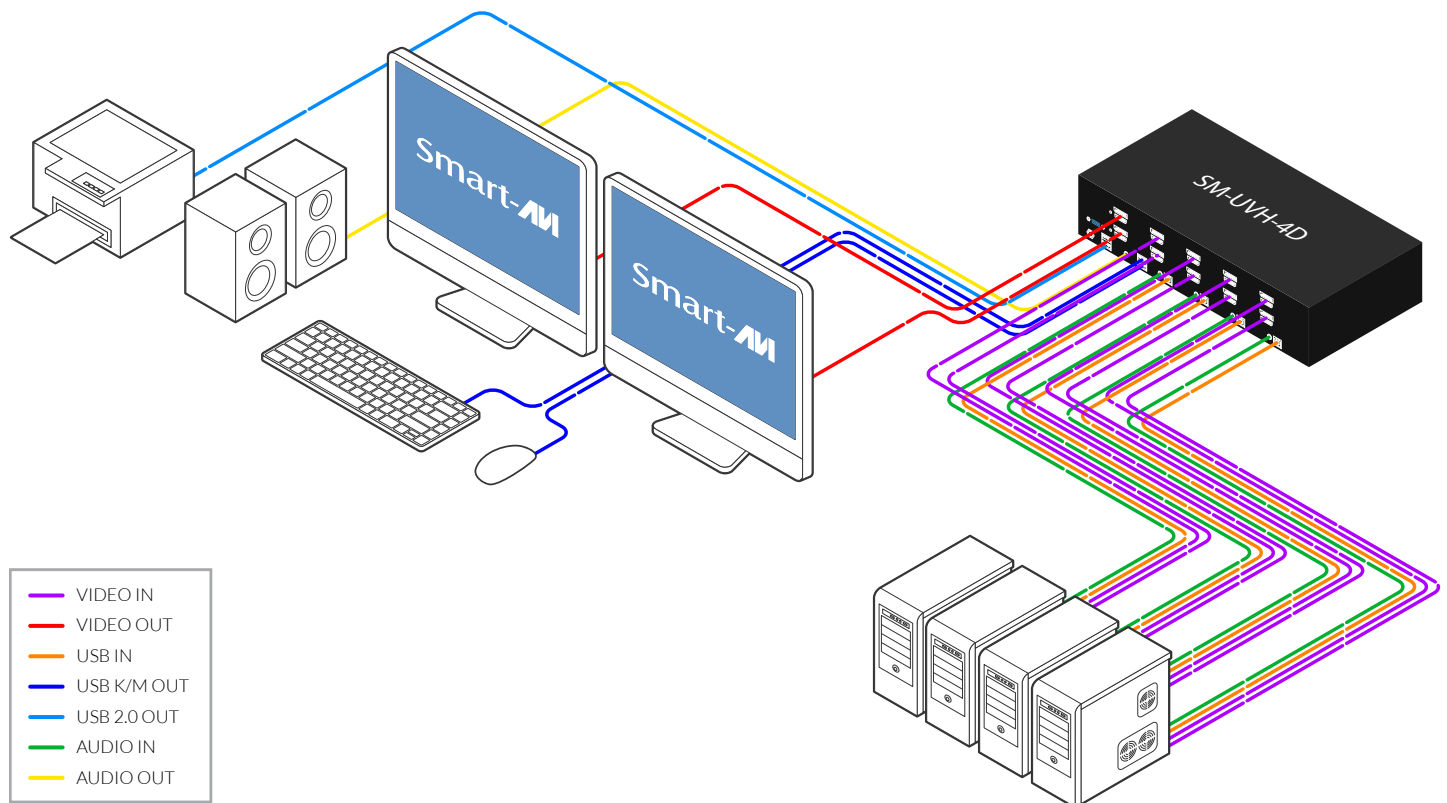

FRONT AND BACK



SM-UVH-4D Back panel




SM-UVH-4D Front panel

- **Strong Mechanical Design**
Durable connector housing ensures long-term reliability.
- **Compact Form Factor**
Slim enough for 2U rack integration.
- **Universal Compatibility**
Supports any mix of DisplayPort & HDMI connections for each input/output.
- **High Performance**
Crisp 4K @ 60Hz UHD video.
- **Proprietary Connector Innovation**
Safer and more resistant to wear compared to industry-standard combined connectors.

Universal DP/HDMI
Input & Output

Slim 2U rackmount-
ready design

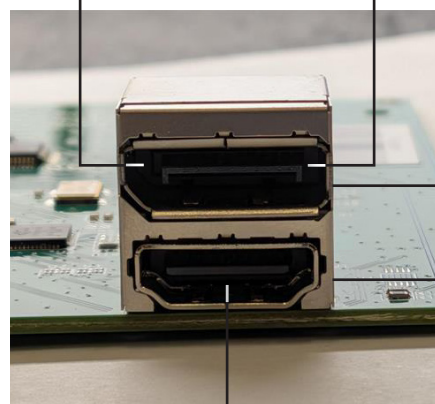

Durable, reinforced
housing

Supports 4K@60
UHD resolution

Optimized for high-
duty enterprise environments

TECHNICAL SPECIFICATIONS

VIDEO	
Format	DisplayPort / HDMI
Input Interface	(8) DisplayPort 20-pin / (8) HDMI 19-pin
Output Interface	(2) DisplayPort 20-pin / (2) HDMI 19-pin
Resolution	3840 x 2160 @ 60 Hz
Color Mode	24-bit
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft.
Output Cable Length	Up to 20 ft.

AUDIO	
Input Interface	(4) 3.5 mm Stereo Audio
Output Interface	(1) 3.5 mm Stereo Audio
Impedance	600 Ohm
Frequency Response	20 Hz to 20 kHz
Nominal Level	0-1.0 V
Common Mode	Rejection at 60 dB

USB	
Signal Type	USB 2.0, 1.1, and 1.0 w/ internal hub
Input Interface	(4) USB Type B
Output Interface	(2) USB 1.1 Type A for KVM Devices; (2) USB 2.0 Type A Transparent

PART NO.	DESCRIPTION
SM-UVH-4D-S	4-Port Dual-Head 4K/60Hz DisplayPort/HDMI KVM Switch with USB 2.0 & Aux Emulation. Includes: [SM-UVH-4D, and PS12VD3A]

CONTROL	
Front Panel	Push Buttons with LED Indicators
RS-232	Via Control @ 115200 bps
Hot Keys	Via Keyboard

OTHER	
Power	External 100-240 VAC/12VDC3A @ 24W
Dimensions	12.57" W x 2.7" H x 6.69" D
Weight	4.2 lbs
Approvals	UL, CE, ROHS Compliant
Operating Temperature	+32 to +104°F (0 to +40°C)
Storage Temperature	-4 to 140°F (-20 to +60°C)
Humidity	Up to 80% (No Condensation)
Emulation	Keyboard and Mouse

www.smartavi.com

Tel: (888) 994-7427 • (702) 800-0005
2917 E Alexander Rd.
North Las Vegas, NV 89030

Smart-AVI
SMART AUDIO VIDEO INNOVATION